


# BLIND RIVETS

## DOMED & CSK HEAD - ALL ALUMINIUM

### ALL ALUMINIUM

ALUMINIUM ALLOY RIVETS WITH ALUMINIUM MANDRELS

Available in Domed Head (R73AA) or Countersunk Head (R72AA)

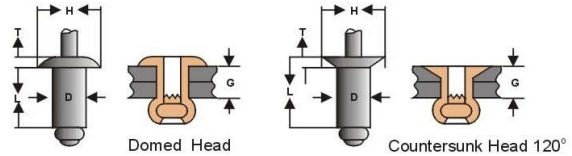

RIVET CODE	RIVET DIAMETER D (MM)	HOLE SIZE (MM)	RIVET LENGTH L (MM)	GRIP RANGE G (MM)	HEAD DIAMETER H (MM)	HEAD THICKNESS T (MM)	STANDARD STRENGTH N (MIN.)	
							SHEAR	TENSILE
3-2 3-4 3-6	2.4mm	2.5 - 2.6	6.0 9.2 12.4	0.8 - 3.2 3.2 - 6.4 6.4 - 9.5	4.52 - 5.03	0.81	300	350
4-1 4-2 4-3 4-4 4-5 4-6 4-8 4-10 4-12	3.2mm	3.3 - 3.4	5.1 6.7 8.2 9.7 11.4 13.0 16.2 19.4 22.2	0.5 - 1.6 1.6 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1	6.05 - 6.65	1.02	535	650
5-2 5-3 5-4 5-5 5-6 5-8 5-10 5-12	4.0mm	4.1 - 4.2	7.3 8.9 10.5 12.0 13.6 16.8 20.0 22.5	0.8 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1	7.52 - 8.33	1.27	850	1020
6-2 6-3 6-4 6-5 6-6 6-8 6-10 6-12 6-14 6-16	4.8mm	4.9 - 5.0	8.0 9.5 11.1 12.7 14.3 17.5 20.7 23.8 27.0 30.2	0.8 - 3.2 3.2 - 4.8 4.8 - 6.4 6.4 - 7.9 7.9 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1 19.1 - 22.2 22.2 - 25.4	9.04 - 10.01	1.52	1160	1420
8-2 8-4 8-6 8-8 8-10 8-12 8-14 8-16	6.4mm	6.5 - 6.6	9.2 12.4 15.5 18.7 21.9 25.1 28.2 31.4	0.8 - 3.2 3.2 - 6.4 6.4 - 9.5 9.5 - 12.7 12.7 - 15.9 15.9 - 19.1 19.1 - 22.2 22.2 - 25.4	12.07 - 13.34	2.03	2050	2500